


# EBERSOL Belt Conveyor

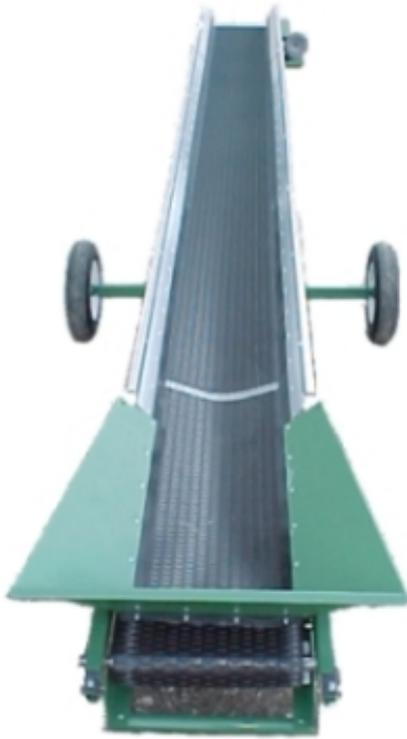

*Shown with optional sides and undercarriage*

---

## Construction Features:

- 16 ga. galvanized body construction
- gear reducer with sprockets and chain
- 8-1/2" body depth
- available in 1 ft. length increments
- belt troughing in slider bed
- hopper

## Options:

- 14, 16, 18, 20, and 24" widths available
- sides with skirting
- galvanized cover
- belt scrapper
- discharge spout
- underhung drive
- hydraulic motor drive adapter
- adjustable stand
- undercarriage with auto tires
- textured or smooth top belts

## Operating Features:

- PVC crescent top belt is standard
- wing tail pulley
- 230 ft. per minute belt speed
- up to 30 degree conveying incline

## Notes:

Conveyor length for 30 degrees incline is determined by multiplying the discharge height by 2.

Example: For a discharge height of 10 feet, a 20 foot conveyor would be required for a 30 degree incline.



---

Manufactured by:  
Bauman Manufacturing Ltd.  
Original Equipment Manufacturer  
Tel. 1-519-669-4333 Fax 1-519-669-2431  
[www.baumanmfg.com](http://www.baumanmfg.com)